Pressure Gauge - (External Use)

Design:	BS EN 837 - 1
Case:	100mm SS304 Case
Bezel:	SS304 Bezel
Window:	PC window
Internals:	Brass
Socket:	Brass
Thread:	3/8" BSP
Connection location:	Bottom or Centre Back
Dial:	Aluminium
Instrument Pointers:	Black Aluminium + Silver Centre
Filling:	Glycerine Filled
Range:	1, 2, 4, 7, 11 and 16 bar
Accuracy Class:	1%
Working Pressure: Steady:	75% Full Scale
Fluctuating:	60% Full Scale
Operating Temperature: Ambient:	-20 to +65°C
Medium:	-20 to +65°C
Storage Temperature:	-40 to +65°C
Short Time:	Full Scale Range
Pressure Element:	Cu-Alloy C-type
Protection:	IP65
Packing Specifications:	Supplied in individual box





Dimensions

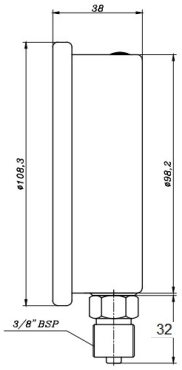



	Code	O/D	DEPTH	M
	BCXXEX BOTTOM	108.3	38	3/8" BSP
	BCXXEX BACK	108.5	38.2	3/8" BSP

Core values, quality products

The information within this document is believed to be correct at the time of publication; however, the document is for guideline use only. For complete accuracy, always check the product with a CORE representative. Certain information may be unavailable or may not have been disclosed. You are responsible for ensuring that any product meets the necessary requirements. Any reliance placed upon this information will be totally at the user's risk.